

# SWIT®

Li-ion V-Mount Battery

PB-C420S

Ver: A

## USER MANUAL

SWIT Electronics Co.,Ltd.

Tel: +86-25-85805753  
Fax: +86-25-85805296  
http://www.swit.cc  
E-mail: contact@swit.cc

Thank you for choosing SWIT products, please read this user manual before using and keep it properly for future reference.

### Warning

#### Remember the following precautions to avoid fire and other safety hazards!

- Do not expose to heat and never throw the battery in a fire to avoid over-heat, battery broken.
- Do not pierce or drill into the outer casing of the unit.
- Do not use outside of specified temperature ranges.
- Do not leave or charge the battery exposed to excessive heat such as in a car or directly under the sun light.
- Do not attempt to use the battery if damaged.
- Do not subject the unit to extreme physical impact or pressure, or Place any object across the terminals that could cause it to short.
- Charge with SWIT battery charger only.
- Keep away from child.

### Caution

- It is normal for the battery to heat up during charging and discharging.
- Always keep the connectors clean.
- The battery will still power down naturally during storage, store in cool and dry conditions, keep the capacity of battery between 25%-50%.
- Battery will get into sleep mode without using for 10 days, need to charge or press button to recover.

### Charging

- Can be charged with SWIT PC-P461 (6A Fast charging), SWIT S-3812S (6A Fast charging), SWIT S-3822S, SWIT PC-P430S, SWIT SC-302S.
- The LED Indicator light will show the remaining power when charging (20%, 40%, 60%, 80%, 95%).
- The ambient temperature range for charging is -4~122°F (-20~50°C), however, 14~104°F (-10~40°C) is recommended for optimizing the discharging performance.

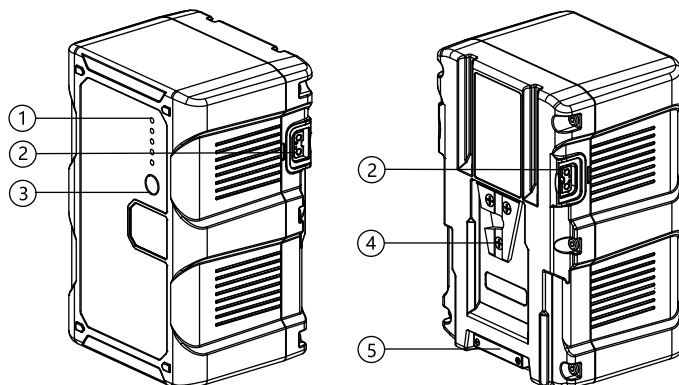
### Features

- 29.4Ah high capacity, power your device for long time.
- Two D-TAP ports for self-charging or external power supply.
- Five power status LED indicators accurately display remaining power capacity.
- There are four types of protection circuits to ensure the battery is protected from Over-charge, Over-discharge, Over-current and Thermal protection.

### Discharging

- Please put on the rubber cover immediately after use the D-tap to avoid dust
- The ambient temperature range for discharging is 32~104°F (0~40°C), however, 50~86°F (10~30°C) is recommended for optimizing the discharging performance.

### Appearance






- ① LED Indicators
- ② D-TAP Input/Output ports
- ③ Indicator button
- ④ V-mount
- ⑤ Main electrode

## Capacity display LEDs

- The LED Indicator light will show the remaining power when charging (20%,40%,60%,80%,95%).

Capacity	LED Display (U → D)
≥95%	●●●●●●
80% ~ 95%	☀●●●●●
60% ~ 80%	○☀●●●●
40% ~ 60%	○○☀●●●
20% ~ 40%	○○○☀●●
<20%	○○○○☀●

### • Trouble shooting

	<p>If the battery is under discharge protection, try the following actions to recover:</p> <ol style="list-style-type: none"> <li>1. Remove the battery and wait for the battery to recover by itself.</li> <li>2. Please put the battery in the shade, after a few minutes of cooling, the battery will automatically recover;</li> </ol> <p>If the battery cannot be recovered after the preceding operations, it indicates that the battery is exhausted. Charge the battery as soon as possible.</p>
	<ol style="list-style-type: none"> <li>1. Remove the battery and wait for the battery to recover by itself.</li> <li>2. please put the battery in the shade, after a few minutes of cooling, the battery will automatically recover;</li> <li>3. Please remove the battery and try to recover it by discharging it.</li> </ol>
	<p>The battery cannot be charged or discharged. Please put the battery in a cool place and wait for the core temperature to decrease (Recommended &gt; 30 minutes). Then hang the battery on the charger and try to charge. If the battery is charged normally, the battery will return to normal.</p>

## Specifications

Model			PB-C420S
Capacity			420Wh, 29.4Ah
Nominal Voltage			14.4V
Output power	Main electrode	Discharging	250W, 20A
		Charging	16.8V≡6A
	D-TAP*2	Discharging	150W,10A
		Charging	16.8V≡6A
	Total discharge power		250W,20A
Dimensions			100.97mm*154.97mm*80mm
Dimensions(With package)			107.05mm*164.6mm*85.43mm
Weight			2.071kg
Weight(With package)			2.109kg
Charging temperature			0℃～40℃ (Recommend 10℃～30℃)
Discharging temperature			-20℃～50℃ (Recommend -10℃～40℃)
Storage temperature			-20℃～50℃